
Evidence of Performance

Resistance to wind load, Watertightness, Air permeability, Operating forces

Test Report No. 13-002207-PR01 (PB-A01-02-en-01)

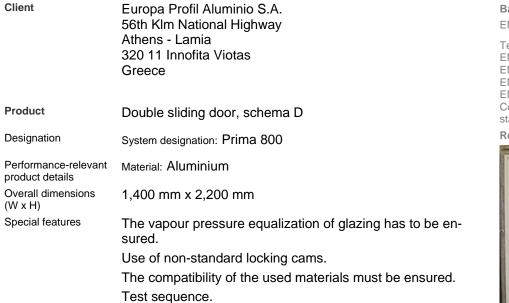

Results

Air permeability according to EN 12207:1999-11



Class 3

Watertightness according to EN 12208:1999-11



Class 4A

Resistance to wind load according to EN 12210:1999-11/AC:2002-08



Class C2 / B3

ift Rosenheim 23.09.2013

Robert Kolacny, Dipl.-Ing. (FH) Deputy Head of Testing Department Building Components

homas Whichsaumer

Thomas Krichbaumer Operating Testing Officer Tightness & Wind Load



Basis EN 14351-1:2006+A1:2010

Test standard/s: EN 1026:2000-06 EN 1027:2000-06 EN 12046-1:2003-11 EN 12211:2000-06 Correspond/s to the national standard/s (e. g. DIN EN)

Representation



Instructions for use

The results obtained can be used by the manufacturer as the basis for the manufacturer ITT test report summary. Observe the specifications set out by the applicable product standard.

Validity

The data and results refer solely to the tested and described specimen. Classification remains valid as long as the product and the above basis remain unchanged. The results can be extrapolated under the manufacturer's own liability subject to observance of the relevant specifications set out by the applicable product standard. This test/evaluation does not allow any statement to be made on any further characteristics regarding performance and quality of the construction presented; in particular the effects of weathering and ageing were not taken into account.

Notes on publication

The **ift**-Guidance Sheet "Advertising with ift test documents" applies. The cover sheet can be used as an abstract. The report contains a total of 27 pages.



ift Rosenheim GmbH Geschäftsführer: Dr. Jochen Peichl Prof. Ulrich Sieberath Dr. Martin H. Spitzner Theodor-Gietl-Str. 7 - 9 D-83026 Rosenheim Tel.: +49 (0)8031/261-0 Fax: +49 (0)8031/261-290 www.ift-rosenheim.de Sitz: 83026 Rosenheim AG Traunstein, HRB 14763 Sparkasse Rosenheim Kto. 3822 BLZ 711 500 00



